

VERTICAL SPACE MISER

Type VSM (Close Coupled)
Type VSMS (Split Coupled)

SMALL FOOTPRINT FOR TIGHT SPACES

Vertically mounted top suction/top discharge pump fits where many pumps won't.

SIMPLIFIED INSTALLATION

- > Same-size suction and discharge connections simplify piping.
- > VSM/VSMS pumps don't require grouting.

LOW LIFE CYCLE COST

- ➤ Contoured suction baffle provides laminar flow to impeller.
- Suction and discharge bends, eliminating the need for suction diffusers, angle type valves and/or elbows, which improves overall system efficiency.
- Short shaft with minimum overhang reduces shaft deflection and improves bearing and mechanical seal life.

EASIER SERVICE


> Top pull out design allows rotating assembly to be removed without disturbing the volute or piping for ease of maintenance and service.


RELIABILITY


- Double volute design helps to reduce radial thrust and prolong seal life.
- Ductile iron construction provides the highest nozzle load in the industry.

PRODUCT RANGE

- > Sizes 4" to 10"
- > Flows up to 4100 GPM
- > Heads up to 400 feet
- > Horsepower up to 125 hp
- > Fluid temp up to 275°F

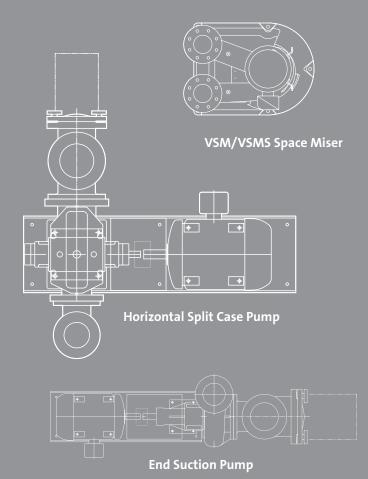




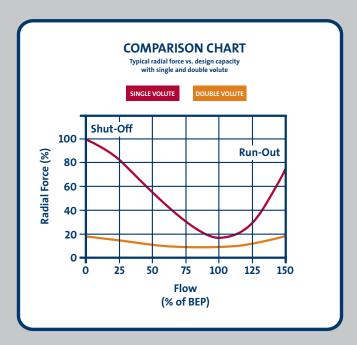

TRUE OVERALL HIGH SYSTEM EFFICIENCY

The PACO VSM efficiency includes the losses in the suction and discharge nozzles. With Francis vane impellers and contoured suction vanes, the VSM provides high efficiency. For a true comparison of efficiencies with other manufacturers' products, losses in suction guides or elbows (for all horizontal suction or discharge units) must be taken into consideration.

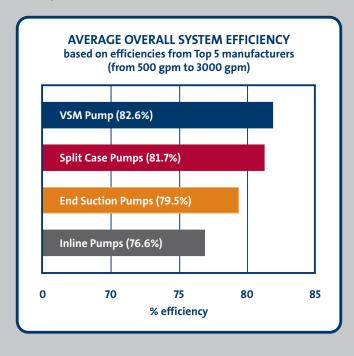

VSM/VSMS

Double Volute Design with **Superior Advantages**

- > Longer life
- Lower maintenance
- Quieter operation
- Space-saving
- Low life cycle cost

Type VSM and VSMS pumps utilize a double volute design that offers a distinct advantage over single volute designs.

The double volute design incorporates two cutwaters located at 180°, which divide the flow into two geometerically similar regions of the volute. The resultant hydraulic forces within the pumps are equal and opposed. As a result, the net radial force is maintained at a very low level throughout the operating range of the pump, and shaft deflection is kept to a minimum.

A typical single volute pump is normally designed to operate at or near the best efficiency point (BEP). In actual application, many pumps stray away from BEP due to load variances and/or changes in the system head curve.

As single volute pumps begin to operate away from BEP, the resultant radial load increases dramatically, causing increased shaft loads, deflection, and vibration. Excessive radial loads can cause premature failure of the mechanical seal, bearings, and shaft.

A double volute design ensures that hydraulic radial loads are equal and opposed and thereby nullified. Pump operation remains stable throughout the entire performance curve, with minimal shaft deflection, prolonging seal, bearing, and shaft life.



TYPE VSM

Close Coupled

BRACKET AND SEAL HOUSING

- > One piece
- > Registered fit
- > Eliminates machining tolerance stacking
- > Provides positive placement
- > Prolongs mechanical seal and bearing life

SHAFT SLEEVE

- > Standard feature
- > Isolates shaft from medium
- Protects shaft from corrosion

MOTOR

> Industry-standard JM frame motor

TYPE VSMS

Split Coupled

AXIALLY SPLIT COUPLING

 Rigid spacer type coupling design allows easy disassembling and replacement of mechanical seal without removing motor

STAINLESS STEEL SHAFT

> Eliminates possibility of oxidation

BRACKET

> Registered fit


MOTOR

> Industry-standard P Base motor



PACO TYPE VSM/VSMS PUMPS -**DESIGNED TO GIVE YOU**

- > Low life cycle and operating costs
- Increased floor space savings
- > Longer mechanical seal, shaft, and bearing life
- Higher operating efficiency
- > Ease in replacement
- > Reduced installation and maintenance costs

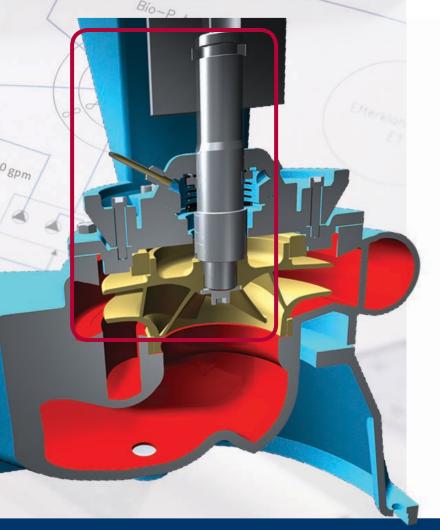

IMPELLER

- > Single suction cast bronze with Francis vanes
- Trimmed to exact customer conditions
- > Static and dynamically balanced to ISO 1940-G3
- > Hydraulically balanced to reduce thrust loads

MECHANICAL SEALS

- > Match construction with site requirements
- > Internal seals are available in various configurations and materials to meet the needs of the application

VOLUTES

- > Made of ductile iron
- Flanges positioned to allow vertical piping
- > Double volute design reduces radial loads, internal recirculation, and turbulence
- > No need for horizontal suction pipe runs, elbows, suction guides, or discharge elbows

NAMEPLATE

> Non-corrosive and located away from insulated areas; contains all data necessary for ordering spare and replacement parts

BRONZE CASE WEAR RINGS

- Included as Standard
- > Allows for simple and inexpensive renewal of "like new" operating tolerances, even after years of operation

DESIGN ADVANTAGES

- > Integrally cast diffuser vane reduces pre-rotation and provides laminar flow into oversized impeller eye
- > No need for external flow straighteners

PUMP STAND

- > Made of ductile iron
- > Designed with smallest possible footprint to support entire pump and motor
- No grouting requirements

VSM/VSMS

Vertical space miser pumps

Technical Data

Flow, Q: max 4,100 gpm Head, H: max 400 feet Fluid temp.: max 275° F 300 psi Working press.: 2 to 125 HP range: Discharge sizes: 4" to 10"

Applications

- · Chilled water
- Condensed water
- Hot water
- Service water
- District heating systems


Optional

- Materials of construction
- Seal materials and configurations
- Motor enclosures

	CASE WORKING PRESSURE	ANSI FLANGE
Standard	175 psi	125 lb.
Optional	300 psi	250 lb.

AVAILABLE MODELS AND NOZZLE LOADS					
	SUCT/	NOZZLE LOADS			
	DISCH	Fz (lb)	(ft. lb)		
40957	4x4	2025	751		
40121	4x4	2025	751		
40127	4x4	2025	751		
40157	4x4	2025	751		
50957	5x5	2863	1012		
50959	5x5	2863	1012		
50129	5x5	2863	1012		
50157	5x5	2863	1012		
60957	6x6	3312	1348		
60125	6x6	3312	1348		
60157	6x6	3312	1348		
80951	8x8	5029	2011		
80123	8x8	5029	2011		
80157	8x8	5029	2011		
10123	10×10	6258	2606		

CONSTRUCTION FEATURES					
FEATURE	VSM	VSMS	MATERIAL(S)		
Volute	•	٠	Ductile Iron - ASTM A536 65-45-12		
Impeller	•	•	Silicon Bronze - ASTM B584 UNS C876000		
Case Wear Rings	•	•	Bronze - ASTM B584 (SAE660)		
Backplate	•	•	Cast Iron - ASTM 48 CI30		
Motor Shaft	•	•	Carbon Steel		
Pump Shaft	N/A	•	Stainless Steel - AISI 303		
Shaft Sleeve	•	N/A	Bronze - ASTM B584 (SAE660)		
Coupling	N/A	•	Aluminum - Axially Split Spacer Type		
Coupling Guard	N/A	•	ANSI/OSHA compliant		
Mechanical Seal	•	•	Type 21 John Crane Single Seal		
Stand	•	•	Ductile Iron - ASTM A536 65-45-12		

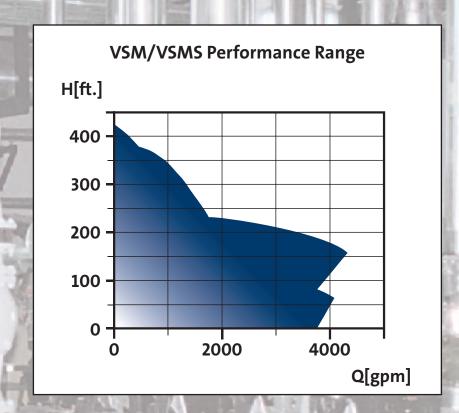

PACO PUMPS HAS YOU COVERED

PACO Pumps offers a full line of pumps to cover all your pumping needs. Visit www.pacopumps.com for information about all of our pumps plus an online selection tool, life cycle cost calculations, technical data, and CAD drawings.



Type KP Split Case Pump



Type KPV Vertically Mounted Split Case Pump



Type VL Vertical Inline Pump



Type LF Frame Mounted End Suction Pump



Type LC End Suction Pump



PACOFlo 9000 Booster System




Type QDSC Submersible Pump



Type NCU Dry-Pit Non-Clog Pump



Type NCP Dry-Pit Non-Clog Pump



PARTS & SERVICE

PACO Pumps is committed to excellence in after-sales service. Genuine PACO parts are pre-engineered and pre-packaged to simplify selection, ordering, and stocking. Virtually all required parts for PACO products are available as kits.



USA

GRUNDFOS Pumps Corporation 17100 West 118th Terrace Olathe, Kansas 66061 Phone: (913) 227-3400 Telefax: (913) 227-3500

USΔ

Grundfos CBS Inc. – PACO Pumps 902 Koomey Road Brookshire, TX 77423 Phone: (800) 955-5847 Telefax: (800) 945-4777

CANADA

GRUNDFOS Canada Inc. 2941 Brighton Road Oakville, Ontario L6H 6C9

Phone: (905) 829-9533 Telefax: (905) 829-9512

MEXICO

Bombas GRUNDFOS de Mexico S.A. de C.V. Boulevard TLC No. 15 Parque Industrial Stiva Aeropuerto C.P. 66600 Apodaca, N.L. Mexico Phone: 011-52-81-8144 4000

Phone: 011-52-81-8144 4000 Telefax: 011-52-81-8144 4010



L-PP-SL-002 • 07/10 (US)

The name Grundfos, the Grundfos logo, and the payoff Be-Think-Innovate are registered trademarks owned by Grundfos Management A/S or Grundfos A/S, Denmark. All rights reserved worldwide.



